

SUCTION AND TRANSPORT HOSE PHARMACEUTICAL AND FOOD GRADE

Master-PUR L-F-SS

Material

Hose wall: 100% pure polyester polyurethane, highly abrasion-resistant

Spiral: PU-coated 316 stainless steel wire

Applications

- Food industry
- Pharmaceutical industry
- Suction and transport hose for abrasive materials and gaseous media
- Clean room applications
- Transport of small particle dusts and powders
- Wet and dry process conveyance
- Stainless steel requirements


Properties

- Antistatic, surface resistance $R_{\circ} < 10^9$ ohm
- Flame-resistant
- Hose wall (conforms to FDA food contact as described in book 21, section 177.2600 and 177.1680)
- Highly abrasion-resistant
- Gas-tight
- Good chemical resistance
- Halogen/plasticizer-free
- Very flexible
- Lightweight
- Improved pressure and vacuum characteristics
- High tensile and burst strength
- Smooth inside, for optimum flow characteristics
- Washable
- Adhesive-free



Construction

1. PU-coated 316 stainless steel spiral
2. Hose wall: polyester polyurethane
3. Wall thickness between spirals .0275"

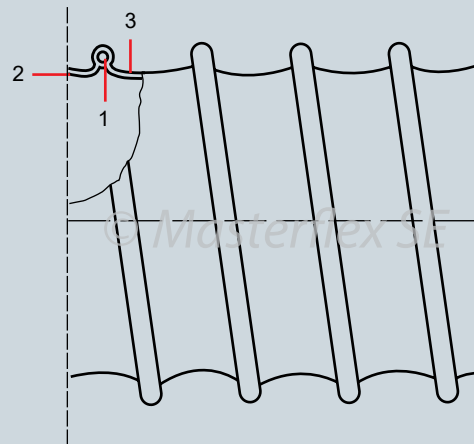

Temperature Range

- -22°F to +195°F
- Intermittent to +260°F

Chem. Resistance

See resistance table



The PUR hose series combines the 3 most important features of a spiral hose into 1 product: antistatic + flame-resistant + food-grade.
A combination with unbeatable features!
-Dr. Les Spark

Master-PUR L-F-SS

Dia (in.)	Positive (in. w.c.)	Negative (in. w.c.)	*Bending radius (in.)	Outer Dia (in.)	Weight (lbs./ft.)	Product Code
1.50	830	265	2.32	1.82	0.29	302-038-588
2.00	675	210	2.72	2.32	0.35	302-050-588
2.40	563	180	2.92	2.72	0.38	302-060-588
2.60	506	150	3.12	2.92	0.41	302-065-588
2.80	450	150	3.12	3.12	0.62	302-070-588
3.00	450	150	3.36	3.36	0.66	302-075-588
3.20	450	120	3.52	3.52	0.70	302-080-588
3.50	394	120	3.96	3.96	0.71	302-090-588
4.00	338	90	4.40	4.40	0.78	302-100-588
4.40	338	90	4.76	4.76	0.79	302-110-588
4.50	281	90	4.96	4.96	0.83	302-115-588
4.80	281	90	5.16	5.16	0.87	302-120-588
5.00	281	90	5.40	5.40	0.91	302-125-588
5.20	225	90	5.56	5.56	0.91	302-130-588
5.60	225	60	5.96	5.96	0.98	302-140-588
6.00	225	60	6.44	6.44	1.04	302-150-588
6.40	225	60	6.80	6.80	1.11	302-160-588
6.80	169	60	7.20	7.20	1.14	302-170-588
7.00	169	60	7.40	7.40	1.17	302-175-588
7.20	169	60	7.60	7.60	1.30	302-180-588
8.00	169	60	8.56	8.56	1.43	302-200-588
9.00	113	30	9.40	9.40	2.07	302-225-588
10.00	113	30	10.40	10.40	2.28	302-250-588
11.00	102	27	11.36	11.40	1.98	302-275-588
12.00	90	24	12.40	12.40	2.16	302-300-588
12.40	90	24	13.00	13.00	2.26	302-315-588
13.00	90	24	13.40	13.40	2.34	302-325-588
14.00	47	24	14.40	14.40	2.51	302-350-588
16.00	47	19	16.40	16.40	2.88	302-400-588

*Referring to the inner side of the elbow of hose.

The above mentioned data refers to an average and ambient temperature of 68° F. Subject to technical changes and color variations. Please refer to technical data sheet when selecting hose.

Standard Production

- Diameter: 1.5" to 16"
- Color: transparent
- Standard lengths: 25'

Available on Request

- Special lengths up to 50'
- Special diameters metric

Installation and connection possibilities



Master-Grip hose clamp, screwable



Hose clamp with worm-gear drive



Car-Grip hose clamp, screwable



Hose connector



Hose reducer, symmetrical

Masterduct, Inc.
5235 Ted Street
Houston, TX 77040 USA
Tel. +1 713 462-5779
Tel. +1 800 318-3300
Fax +1 713 939-8441
www.Masterduct.com

 **MASTERDUCT**
Connecting Values